

## SIDEWALL FABRIC SET-UP


Professional Grade Fabric



**Step 1.** Completely set up your E-Z UP® Freestanding Wall in the area that you intend to use, according to instruction Freestanding Wall Steps 1-5 on previous page.

**Step 2.** Attach sidewall to frame as shown. Wrap top hook and loop straps around the top inner rail.

**Step 3.** Wrap side hook and loop straps around the extended legs. Press straps into pad firmly.

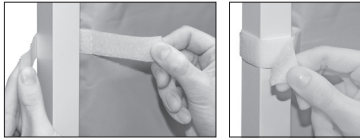

## WALL FABRIC SET-UP

Stretch Fit Fabric




**Step 1.** Completely set up your E-Z UP® Freestanding Wall in the area that you intend to use, according to instruction Freestanding Wall Steps 1-5 on previous page.

**Step 2.** Open side zipper and slide wall around the top inner rail.


**Step 3.** Pull fabric down over the extended legs. Wall side openings should allow access to the fixed corner bracket(s) as shown.

**Step 4.** Close side zipper, adjust and straighten wall fabric.

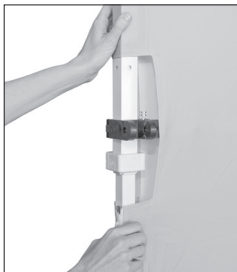


## RAILSKIRT FABRIC SET-UP

Professional Grade Fabric

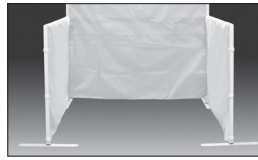


**Step 1.** Completely set up your E-Z UP® Freestanding Wall and Railskirt Kit in the area that you intend to use, according to instruction Steps 1-8.

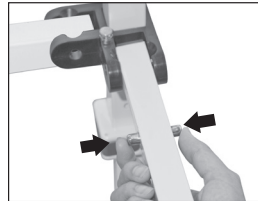

**Step 2.** To remove the railskirt pole from the frame, press both exposed snap buttons on the railskirt pole and slide off the fixed corner bracket.



**Step 3.** Slide the railskirt pole into the railskirt fabric through the top fabric sleeve.

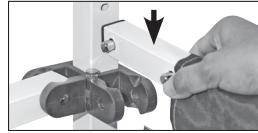

**Step 4.** Re-attach the railskirt pole to the fixed corner bracket on the adjacent leg.



**Step 5.** Wrap the railskirt hook and loop straps around the frame legs and fasten.

Repeat the above steps to install the second railskirt on the adjacent leg.




# E-Z UP®


FREESTANDING WALL

## INSTRUCTIONS


**5' Freestanding Wall:** (2) Extended Legs, (2) Base Plates, (2) Inner Rails, (2) Hook and Loop Straps, (2) Fixed 90 Degree Corner Brackets

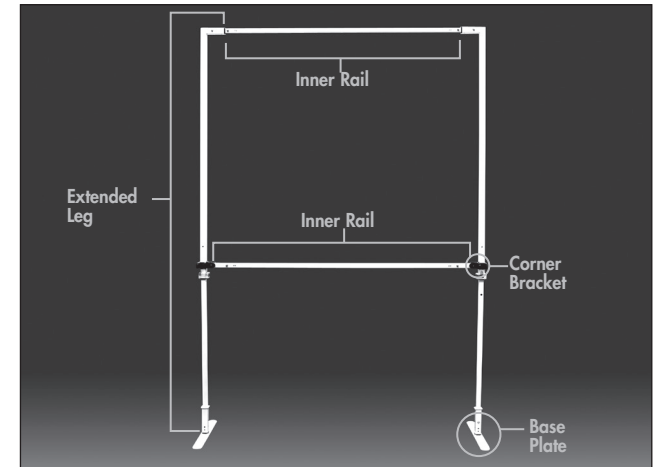

**Step 1.** Attach the inner rail to the extended leg by depressing the snap button of the inner rail and inserting the inner rail into the short end of the extended leg until the snap button engages. Repeat on opposite side.

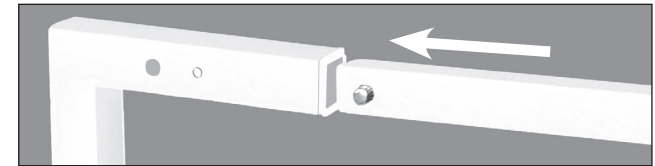

**Step 2.** Attach the extended leg to the base plate by depressing the snap button on the base plate and inserting it into the longer end of the extended leg until the snap button engages. Repeat for second extended leg and base plate.

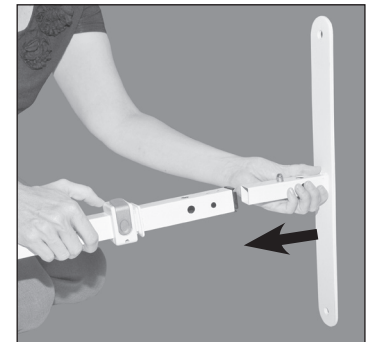

## PRODUCT WARRANTY

INTERNATIONAL E-Z UP, INC., manufacturer of the E-Z UP® Free-Standing Sidewall, warrants to the original purchaser who provides a dated sales receipt from an Authorized Dealer, each part to be free from defects in material or workmanship for a period of **two years** after the date of original purchase. This warranty applies only for normal and expected uses, as determined by the manufacturer.


[ezup.com](http://ezup.com)

**INTERNATIONAL E-Z UP, INC.**


1900 Second Street, Norco, California 92860 USA

Phone (951) 279-0999 • Fax (951) 279-0888 [ezup.com](http://ezup.com)

**800-45 SHADE**  
800-457-4233

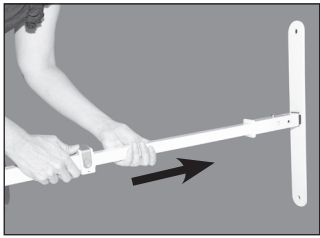


**Step 3.** Extend height of wall by depressing the toggle button and extend both legs to desired height. **Note:** For freestanding wall package, extend the legs to the 2nd position. Raise the freestanding wall.

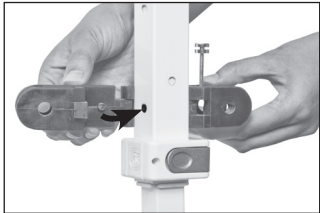


**Step 4.** Open the fixed corner bracket by lifting locking pin up and opening the jaws.

Wrap the bracket fully around the leg and insert the guide tab into the mounting hole on the leg.

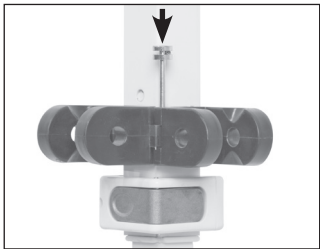

Push the locking pin down to secure. Be sure the bracket clamps extend toward you and inside the frame.

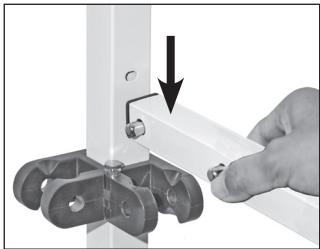

**Step 5.** Align the snap buttons on the inner rail pole end onto the ramped guide of the bracket. Press down on the pole until both snap buttons engage.



**Repeat steps on opposite side to complete the Freestanding Wall Set up.**

**Note: Skip Steps 6 - 8 to Set Up 5' (1.5m) Freestanding Wall Fabric Only.**


## INSTRUCTIONS

**5' (1.5m) Freestanding Railskirt Kit:** (2) Base Plates, (2) Freestanding Railskirt Legs, (2) 5' (1.5m) Railskirt Poles


**(For use with Stretch Fit Fabric Wall or Freestanding Sidewall)**  
Prior to setting up Railskirt Kit, install the stretch fit fabric wall or professional sidewall according to instructions on the back page.

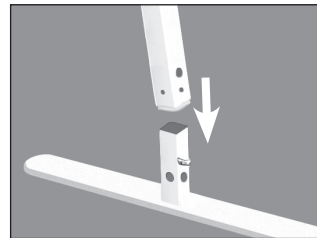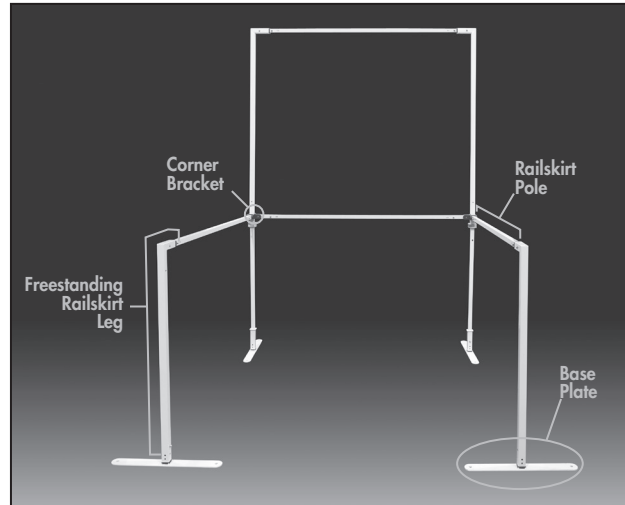

**Step 6.** Line up the snap button on the base plate with the larger diameter hole of the leg. Attach the base plate to each leg by depressing the snap button on the base plate and inserting it into the longer end of the leg until the snap button engages.

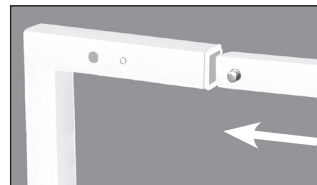

**Step 7** Attach a railskirt pole to each freestanding railskirt leg by depressing the snap button on the leg and inserting it into the short end of the leg until the snap button engages.

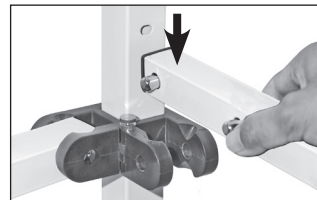


**Step 8.** Align the snap buttons on the opposite end of the railskirt pole onto the ramped guide of the fixed corner bracket. Press down on the pole until both snap buttons engage.

**Repeat steps 6 - 8 on opposite side of the frame to complete the Freestanding Railskirt Kit Set up.**

## COMBINE (2) FREESTANDING WALL PACKAGES

**(For use with 10' (3.0m) Professional Grade Fabric Sidewall Only)**



Set up both Freestanding Walls by referring to the Free-standing Wall instructions Steps 1 - 3.

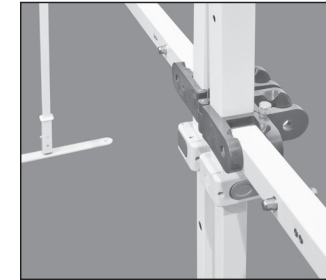

**Step 1.** Open the fixed corner bracket by lifting locking pin up and opening the jaws. Wrap the bracket fully around the leg and push the locking pin down to secure.

Be sure the bracket clamps extend rearwards.

**Step 2.** Attach inner rails by completing Freestanding Wall instructions Step 5.

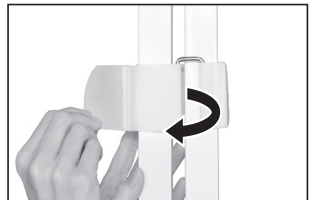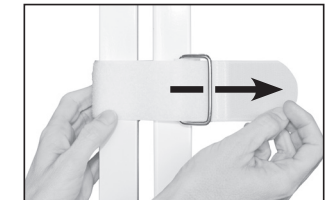

**Step 3.** Secure both frames together with the included hook and loop metal straps. Wrap and fasten the hook and loop strap(s) around the top and bottom of the adjacent center extended legs.

To fasten pull the strap through the metal hook. Flip over and press the loop side of the strap into the hook side to secure.

**Step 4. (Optional)** In order to add Railskirt Kit, complete Freestanding Railskirt Kit instructions Steps 6 - 8.

**Note:** The Freestanding Railskirt Leg Assemblies will be set up on the outside extended legs.

